### MORE POWER - LESS SPACE®

## 12AVR90

- Exclusive IPF® technology optimizes power capacity, cell consistency, and long-term reliability
- Advanced AGM technology for superior high-rate power
- Puncture resistant micro-porous glass mat separators extend life
- Front access design for easy installation and maintenance
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy sealed posts eliminate leaks
- Flame arresting, low-pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188
- Designed to meet GR4228 specifications
- 48 volt system fits in 23" relay rack tray

#### **SPECIFICATIONS**

Nominal Voltage: 12-Volts

Rating: 82.1 Ampere-Hours

@ 8 hr. rate to 1.75 V.P.C.

**Positive Plate:** >98% Pure lead with tin-calcium alloy

Negative Plate: Pure lead, calcium alloy

Post Seal: Epoxy-sealed

**Terminal:** Top access, 1/4" – 20 threaded insert

Case/Cover: Flame-retardant, polypropylene -

UL 94 V-0/>28% L.O.I.

Safety Vent: Low positive pressure,

self-sealing w/ flame arrestor

Float Voltage: 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)

**Design life:** 10 years in float applications @ 77°F (25°C)

**Dimensions:** Length - 12.01" (305.2 mm)

Width - 6.56" (166.7 mm)


Height - 8.24" (209.3 mm)

Weight: 64.5 lbs. (29 kg)

# DISCHARGE RATINGS IN AMPS @ 77°F (25°C)†

Volts per Cell (V.P.C.)	1 HR.	2 HR.	3 HR.	4 HR.	5 HR.	8 HR.	12 HR.	20 HR.	24 HR.	
1.75	57.3	33.2	23.9	18.7	15.5	10.3	7.1	4.4	3.7	
1.80	55.3	32.5	23.4	18.4	15.2	10.1	7.0	4.3	3.7	
1.85	51.8	30.8	22.2	17.5	14.5	9.6	6.7	4.2	3.5	
1.88	48.7	29.1	21.1	16.6	13.8	9.2	6.4	4.0	3.3	
1.90	45.7	27.7	20.1	15.9	13.2	8.7	6.1	3.8	3.2	

†Subject to change without notice.

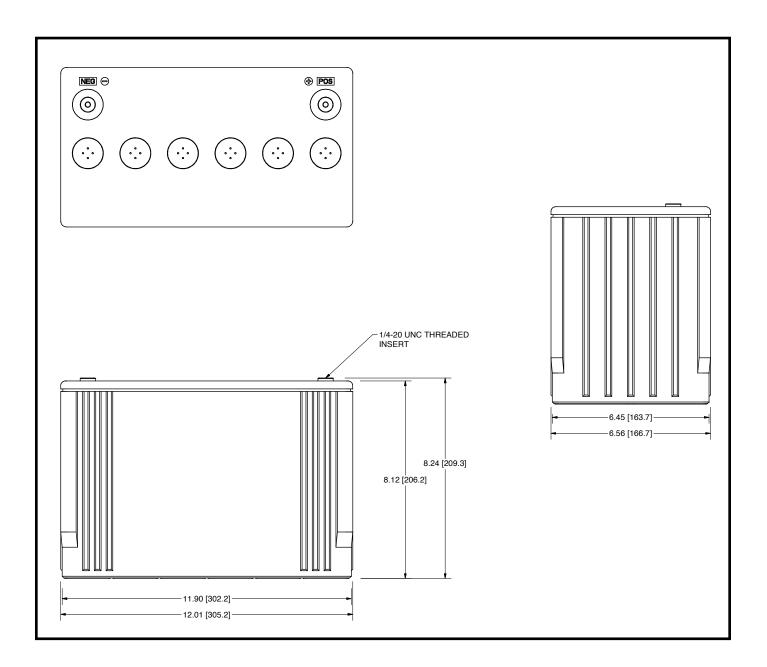

### **INSTALLATION AND OPERATING INSTRUCTIONS**

• http://www.eastpennmanufacturing.com/wp-content/uploads/Unigy-I-IO-Manual-0902.pdf



www.dekabatteries.com





