

8A24 HEI

SPECIFICATIONS

| | |
|---------------------|-----------------|
| Nominal Voltage (V) | 12V |
| Capacity at C/100 | 91 Ah |
| Capacity at C/20 | 79 Ah |
| Capacity at C/5 | 69.2 Ah |
| Weight | 52 lbs. (24 kg) |
| Plate Alloy | Lead Calcium |
| Post Seal | Epoxy-Sealed |
| Container/Cover | Polypropylene |

Operating Temperature Range
-40°F (-40°C) - 140°F (60°C)

Caltrans BBS temperature clause will be supported
Temperature and battery age effect runtime

Charge Voltage @ 77°F (25°C)

| | |
|--------------------------------|-----------------|
| Charge / Absorption / Equalize | 2.30 - 2.43 VPC |
| Float / Standby | 2.23 - 2.26 VPC |

Vent Self-sealing

Terminal C (Insert w/ 1/4" - 20 round hole)



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

Distributed by:

Valve-Regulated, Absorbed Glass Mat Technology



DIMENSIONS


Inches (mm)

Length 10.90 (277 mm)
including handle

Width 6.56 (167 mm)

Height 8.27 (210 mm)

AGM Cycle Life vs Depth of Discharge at +25°C (77°F)
Based on BCI 2-hour Capacity

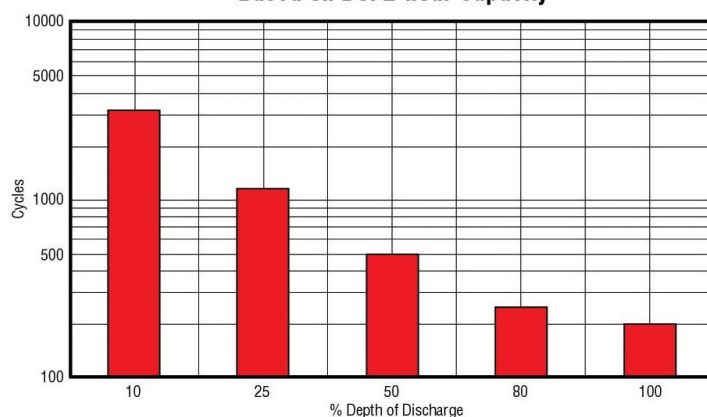

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

