

# 8GTE35-DEKA

## SPECIFICATIONS

Nominal Voltage (V)	6V
Capacity at C/100	211 Ah
Capacity at C/20	196 Ah
Capacity at C/5	167 Ah
Weight	69 lbs. (31 kg)
Plate Alloy	Lead Calcium
Posts	Forged Bushings
Container/Cover	Polypropylene
Operating Temperature Range	-76°F (-60°C) - 140°F (60°C)

For Charging Parameters please refer to [www.mkbattery.com](http://www.mkbattery.com)

Click on Technical Data, then on Photovoltaic Charging Parameters in the PV/Solar section

Vent	Self-sealing
Electrolyte	Sulfuric acid thixotropic gel
Terminal	SAE



Rated UN2794, wet filled with acid

Made in the U.S.A. by East Penn Manufacturing Co., Inc.

## Valve-Regulated, Gelled-Electrolyte Battery




## DIMENSIONS

*Inches (mm)*

Length	9.64 (245 mm)
Width	7.51 (191 mm)
Height	10.65 (270 mm) <i>Including terminal</i>

Gel Cycle Life vs Depth of Discharge at 25°C (77°F)  
Based on BCI 2-hour Capacity

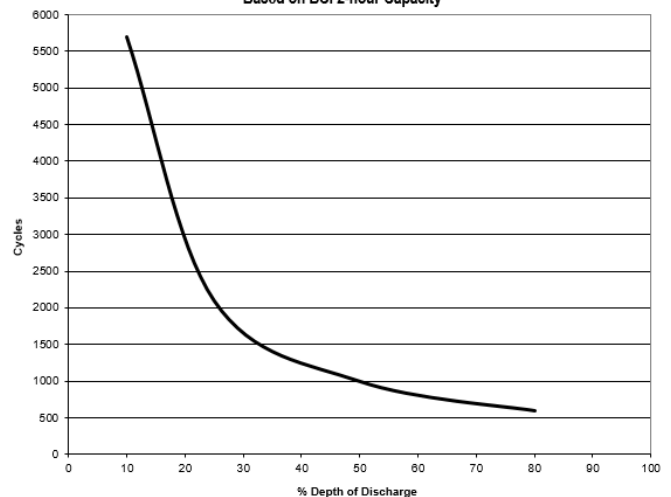

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

