



ES26-12T

SPECIFICATIONS

Nominal Voltage (V) 12V

Nominal Capacity

20 hour rate (1.3A to 10.50V)	26Ah
10 hour rate (2.47A to 10.50V)	24.7Ah
5 hour rate (4.42A to 10.20V)	22.1Ah
1C (26A to 9.60V)	14.73Ah
3C (78A to 9.60V)	10.4Ah

Weight Approx. 20.1Lbs. (9.12kg)

Internal Resistance (at 1KHz) Approx. 9 mΩ

Maximum Discharge Current for 5 seconds : 390A

Operating Temperature Range

Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 months	90%
6 months	80%

Charging Methods at 25°C (77°F)

Cycle Use : Charging Voltage 14.4 to 15.0V
Coefficient -5.0mv / °C / cell
Maximum Charging Current : 7.8A

Standby Use : Float Charging Voltage 13.5 to 13.8V
Coefficient -3.0mv / °C / cell




Case Material : ABS
(Option : UL94 HB Flame Retardant Case Material)

Terminal : F3

Maintenance-Free Rechargeable Sealed Lead-Acid Battery



DIMENSIONS

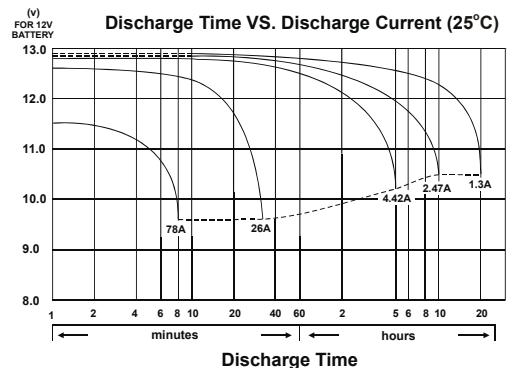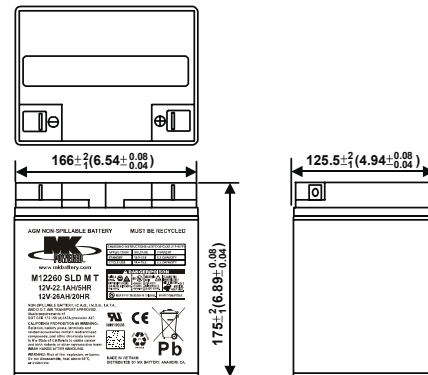

MK Battery

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

